


## 封闭弹簧微启式安全阀

### ■ 系列 /

A41H-16C、A41H-25、A41H-40、A41Y-64、A41Y-100、KA41H-16C

A41Y-16P、A41Y-25P、A41Y-40P、A41Y—64P、A41Y-100P、KA41Y-25P

A41Y-16R、A41Y-25R、A41Y-40R、A41Y—64R、A41Y-100R、KA41Y-25R

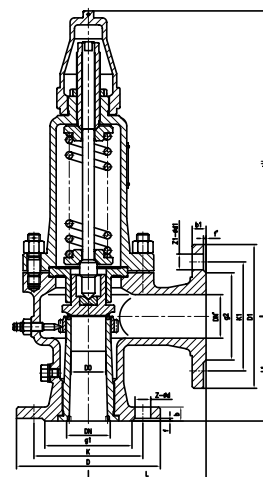

### ■ 用途 /

A41H 型适用于工作温度 $\leq 300^{\circ}\text{C}$ 的石油气、空气、水等介质的设备或管路上。A41Y-P/R 型适用于工作温度 $\leq 200^{\circ}\text{C}$ 有腐蚀性介质的设备或管路上，作为超压保护装置。

连接法兰标准按 JB/T.....94/ 系列 1。

### ■ 主要零件与材质 /

No.	零件名称	A41H-C/KA41Y-C 材料	A41H-P/KA41Y-P 材料	A41H-R/KA41Y-R 材料
1	阀体	WCB	ZG1Cr18Ni9Ti	ZG1Cr18Ni12Mo2Ti
2	阀座	ZG2Cr13/1Cr18Ni9Ti	ZG1Cr18Ni9Ti	ZG1Cr18Ni12Mo2Ti
3	调节圈	ZG2Cr13/1Cr18Ni9Ti	ZG1Cr18Ni9Ti	ZG1Cr18Ni12Mo2Ti
4	阀瓣	2Cr13/1Cr18Ni9Ti	1Cr18Ni9Ti	1Cr18Ni12Mo2Ti
5	导向套	ZG2Cr13/1Cr18Ni9Ti	ZG1Cr18Ni9Ti	ZG1Cr18Ni12Mo2Ti
6	阀盖	ZG230-450	ZG1Cr18Ni9Ti	ZG1Cr18Ni12Mo2Ti
7	弹簧	50CrVA	50CrVA 包覆氟塑料	50CrVA 包覆氟塑料
8	阀杆	2Cr13	1Cr18Ni9Ti	1Cr18Ni12Mo2Ti
9	调整螺杆	45	ZG1Cr18Ni9Ti	2Cr13
10	保护罩	ZG200-400	ZG200-400	ZG1Cr18Ni12Mo2Ti
	密封面材料	堆焊 D507	堆焊 Co 基硬质合金	

\* 内容仅供参考，更多需求请联系我们。

## 主要外形尺寸 /

型号	DN	D0	D	K	g	g1	b	f	f1	Z- Φd	DN'	D 1	k1	g2	g'	b1	f'	f1'	Z1- Φd1	L	L1	H
A41H-16C A41Y-16P KA41Y-16R KA41Y-16C KA41Y-16P	20	15	105	75	-	55	16	2	-	4-14	20	105	75	55	-	16	2	-	4-14	100	85	276
	25	20	115	85	-	65	16	2	-	4-14	25	115	85	65	-	16	2	-	4-14	100	85	276
	32	25	140	100	-	78	18	2	-	4-18	32	140	100	78	-	18	2	-	4-18	115	100	285
	40	32	150	110	-	85	18	3	-	4-18	40	150	110	85	-	18	3	-	4-18	120	110	292
	50	40	165	125	-	100	20	3	-	4-18	50	165	125	100	-	20	3	-	4-18	135	120	370
	65	50	185	145	-	120	20	3	-	4-18	65	185	145	120	-	20	3	-	4-18	140	130	375
	80	65	200	160	-	135	20	3	-	8-18	80	200	160	135	-	20	3	-	8-18	160	135	373
	100	80	220	180	-	155	22	3	-	8-18	100	220	180	155	-	22	3	-	8-18	170	160	513
	125	100	250	210	-	185	22	3	-	8-18	125	250	210	185	-	22	3	-	8-18	190	190	560
	150	125	285	240	-	210	24	3	-	8-23	150	285	240	210	-	24	3	-	8-23	205	195	570
	200	150	340	295	-	265	26	3	-	12-23	200	340	295	265	-	26	3	-	12-23	240	230	717
	250	200	405	355	-	320	30	3	-	12-26	250	405	355	320	-	30	3	-	12-26	350	320	940
300	250	460	410	-	375	30	4	-	12-26	300	460	410	375	-	30	4	-	12-26	350	320	980	
A41H-25 A41Y-25P A41Y-25R KA41Y-25 KA41Y-25P	20	15	105	75	-	55	16	2	-	4-14	20	105	75	55	-	16	2	-	4-14	100	85	276
	25	20	115	85	-	65	16	2	-	4-14	25	115	85	65	-	16	2	-	4-14	100	85	276
	32	25	140	100	-	78	18	2	-	4-18	32	140	100	78	-	18	2	-	4-18	115	100	285
	40	32	150	110	-	85	18	3	-	4-18	40	150	110	85	-	18	3	-	4-18	120	110	292
	50	40	165	125	-	100	20	3	-	4-18	50	165	125	100	-	20	3	-	4-18	135	120	370
	65	50	185	145	-	120	22	3	-	8-18	65	185	145	120	-	20	3	-	4-18	140	130	375
	80	65	200	160	-	135	24	3	-	8-18	80	200	160	135	-	20	3	-	8-18	160	135	373
	100	80	230	190	-	160	24	3	-	8-23	100	220	180	155	-	20	3	-	8-18	170	160	513
	125	100	270	220	-	188	28	3	-	8-26	125	250	210	185	-	22	3	-	8-18	190	190	560
	150	125	300	250	-	218	30	3	-	8-26	150	285	240	210	-	24	3	-	8-23	205	195	570
	200	150	360	310	-	278	34	3	-	12-26	200	340	295	265	-	26	3	-	12-23	240	230	717
	250	200	425	370	-	332	36	3	-	12-30	250	405	355	320	-	30	3	-	12-26	350	320	940
300	250	485	430	-	390	40	4	-	16-30	300	460	410	375	-	30	4	-	12-26	350	320	980	
A41H-40 A41Y-40P A41Y-40R KA41Y-40 KA41Y-40P	20	15	105	75	51	55	16	2	4	4-14	20	105	75	55	-	16	2	-	4-14	100	85	276
	25	20	115	85	58	65	16	2	4	4-14	25	115	85	65	-	16	2	-	4-14	100	85	276
	32	25	140	100	66	78	18	2	4	4-18	32	140	100	78	-	18	2	-	4-18	115	100	285
	40	32	150	110	76	85	18	3	4	4-18	40	150	110	85	-	18	3	-	4-18	120	110	292
	50	40	165	125	88	100	20	3	4	4-18	50	165	125	100	-	20	3	-	4-18	135	120	370
	65	50	185	145	110	120	22	3	4	8-18	65	185	145	120	-	20	3	-	4-18	140	130	375
	80	65	200	160	121	135	22	3	4	8-18	80	200	160	135	-	20	3	-	8-18	160	135	373
	100	80	235	190	150	160	24	3	4.5	8-23	100	220	180	155	-	22	3	-	8-18	170	160	513
	125	100	270	220	176	188	28	3	4.5	8-26	125	250	210	185	-	22	3	-	8-18	190	190	560
	150	125	300	250	204	218	30	3	4.5	8-26	150	285	240	210	-	24	3	-	8-23	205	195	570
	200	150	375	320	260	282	38	3	4.5	12-30	200	340	295	265	-	26	3	-	12-23	240	230	717
	250	200	450	385	313	345	42	3	4.5	12-34	250	405	355	320	-	30	3	-	12-26	350	320	940
300	250	515	450	364	408	46	4	4.5	16-34	300	460	410	375	-	30	4	-	12-26	350	320	980	

\* 内容仅供参考，更多需求请联系我们。

## 主要外形尺寸 /

型号	DN	D0	D	K	g	g1	b	f	f1	Z- Φd	DN'	D 1	k1	g2	g'	b1	f'	f1'	Z1- Φd1	L	L1	H
A41H-64 A41Y-64 A41Y 64 A41Y-64R	20	15	130	90	51	68	20	2	4	4-18	20	105	75	55	51	16	2	4	4-14	100	95	268
	25	20	140	100	58	78	22	2	4	4-18	25	115	85	65	58	16	2	4	4-14	100	95	268
	32	25	155	110	66	82	24	2	4	4-23	32	140	100	78	66	18	2	4	4-18	115	105	279
	40	32	170	125	76	95	24	3	4	4-23	40	150	110	85	76	18	3	4	4-18	135	115	330
	50	40	180	135	88	105	26	3	4	4-23	50	165	125	100	88	20	3	4	4-18	160	125	360
	65	50	205	160	110	130	28	3	4	8-23	65	185	145	120	110	22	3	4	8-18	175	160	503
	80	65	215	170	121	140	30	3	4	8-23	80	200	160	135	121	22	3	4	8-18	175	160	498
	100	80	250	200	150	168	32	3	4.5	8-26	100	235	190	160	150	24	3	4	8-23	190	180	530
	150	100	345	280	204	240	38	3	4.5	8-34	150	300	250	218	204	30	3	4	8-26	280	260	657
A41H-100 A41Y-100 A41Y-100P A41Y-100R	20	15	130	90	51	68	20	2	4	4-18	20	105	75	55	51	16	2	4	4-14	100	95	268
	25	20	140	100	58	78	22	2	4	4-18	25	115	85	65	58	16	2	4	4-14	100	95	268
	32	25	155	110	66	82	24	2	4	4-23	32	140	100	78	66	18	2	4	4-18	115	105	279
	40	32	170	125	76	95	24	3	4	4-23	40	150	110	85	76	18	3	4	4-18	135	115	330
	50	40	180	135	88	105	26	3	4	4-23	50	165	125	100	88	20	3	4	4-18	160	125	360
	65	50	205	160	110	130	28	3	4	8-23	65	185	145	120	110	22	3	4	8-18	175	160	503
	80	65	215	170	121	140	30	3	4	8-23	80	200	160	135	121	22	3	4	8-18	175	160	498
	100	80	250	200	150	168	32	3	4.5	8-26	100	235	190	160	150	24	3	4	8-23	190	180	530
	150	100	345	280	204	240	38	3	4.5	8-34	150	300	250	218	204	30	3	4	8-26	280	260	657

\* 内容仅供参考，更多需求请联系我们。